


## Tailgate Repair Harness. 850 or V70 Wagon

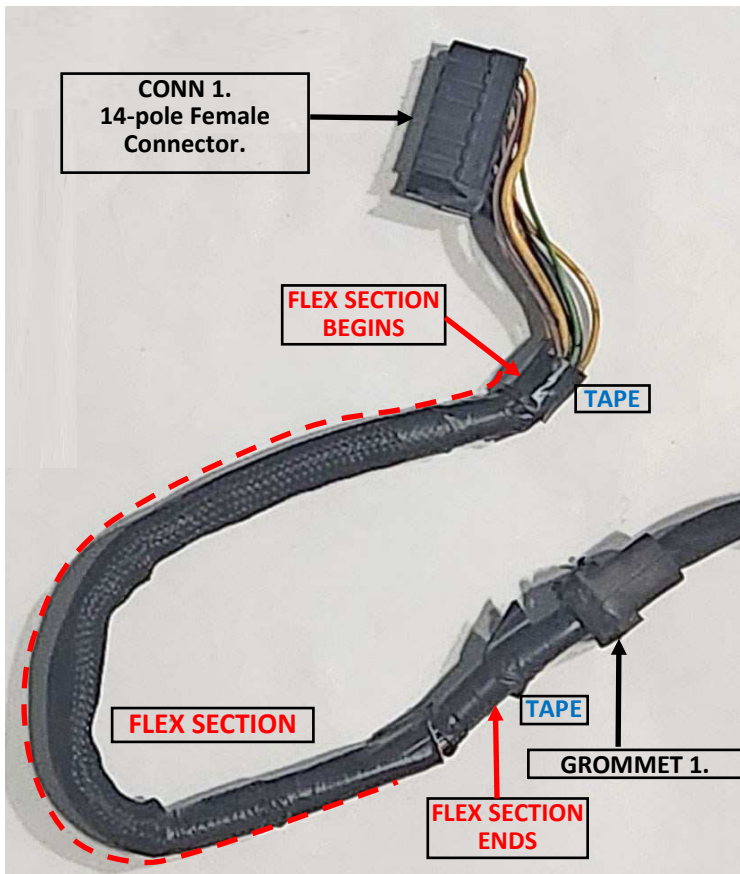


This repair harness was developed from a used tailgate harness provided by a customer with a 2000 V70. These original harnesses commonly failed in the FLEX SECTION after years of opening the rear hatch. The new repair harness was developed using special ultra-flexible wire with silicone insulation. Using this repair harness, the original tailgate harness can continue to remain in place once the new repair section wires are spliced near the first rubber grommet shown above.

The 14-position connector comes with 12 wires. There may be models with slightly different wire numbers or more wires. If more information comes, I'll add it here. It's believed this repair harness will serve at least the years 1996 (850) through 2000 (V70), but it may serve earlier or later years. Hopefully some customer information can help determine more.

If you encounter an 850 or V70 wagon with a different number of wires or with a different wire order than shown in this guide, make note of it and let us know.

# EXAMPLE: 9459326 Tailgate Harness 2000 V70 Wagon

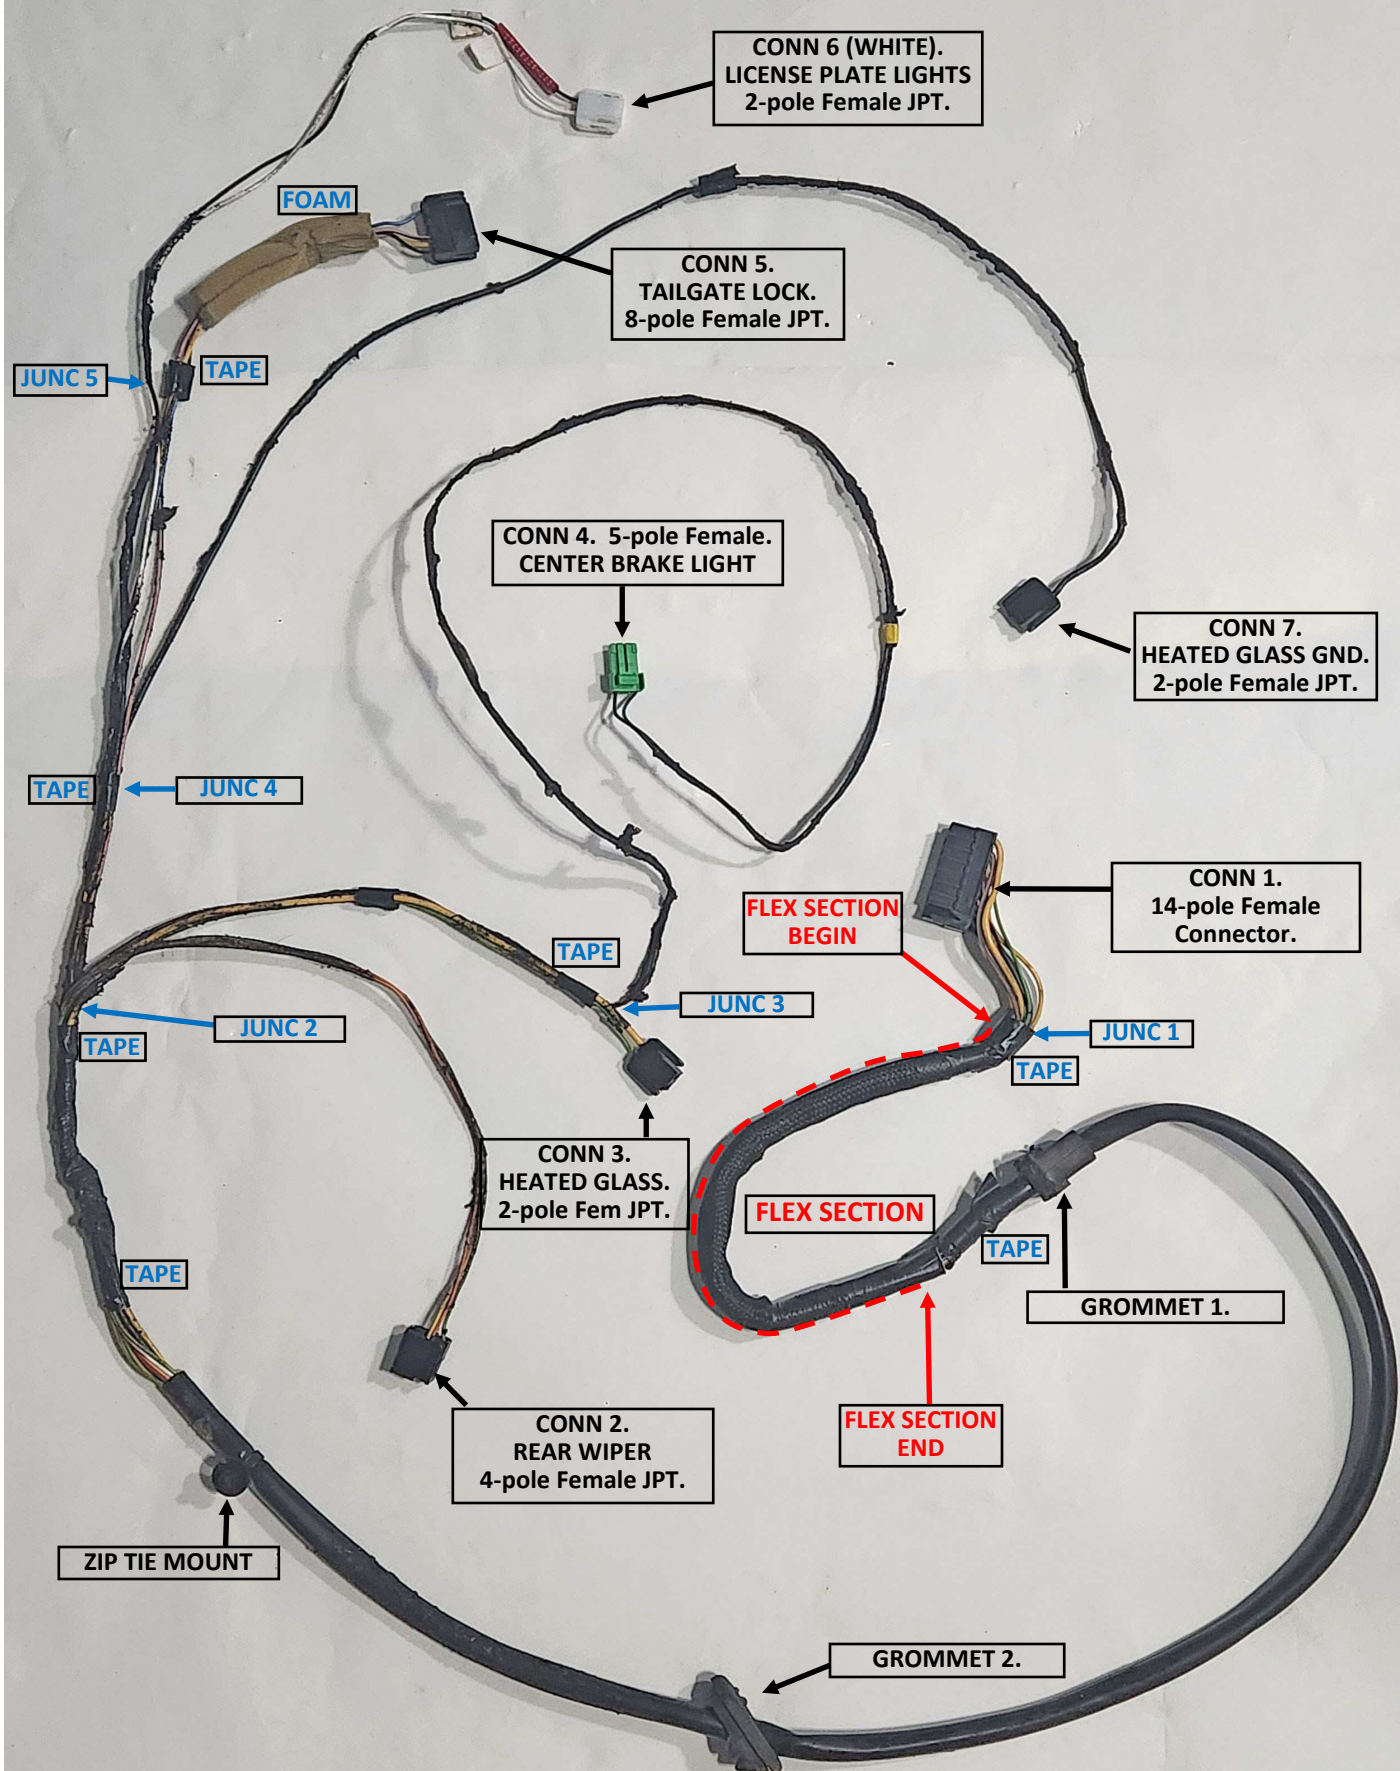



1

## 14-Pole Female JPT Connector (BLACK).

### CONNECTOR WIRE ORDER



	13	11	9	7	5	3	1	
14	12	10	8	6	4	2		

VIEW FROM REAR

### WIRE COLORS:

- |                 |   |   |
|-----------------|---|---|
| 1. Yell-Red 3.0 | to 3/1.   | 2-pole pin 1. Rear heated glass.                |
| 2. Yell-Grn     | to 3/2 (or possibly no wire)  | 2-pole pin 2. Rear heated glass.                |
| 3. Pink-Blk     | to 5/6 (or Yel-Brn)   | 8-pole pin 6. Tailgate lock.                    |
| 4. Yell         | to 5/7  | 8-pole pin 7. Tailgate lock.                    |
| 5. —            | (possibly Yel-Gray if wire is present. To Conn 5/4 for Tailgate lock) |   |
| 6. —            | (possibly Grn-Brn if wire is present. To Conn 5/5 for Tailgate lock)  |   |
| 7. Org-Blk      | to 2/3  | 4-pole pin 3. Wiper ground.                     |
| 8. Grn-Org      | to 2/1  | 4-pole pin 1. Wiper control circuit.            |
| 9. Yell-Vio     | to 2/2  | 4-pole pin 2. Wiper power.                      |
| 10. Blk 1.0     | to *Blk Common  | Common splice. Ground.                          |
| 11. Wht         | to 6/1  | 2-pole pin 1 (WHITE plug). License plate light. |
| 12. Gray-Blk    | to 4/1  | 5-pole pin 1 (GREEN plug). Center stop light.   |
| 13. Blu-Brn     | to 5/1  | 8-pole pin 1. Tailgate lock microswitch.        |
| 14. Blk 3.0     | to 7/1  | 2-pole pin 1. Ground for rear heated glass.     |

\*Blk common splice: Common with 1/10, 4/5, 5/8, 6/2.

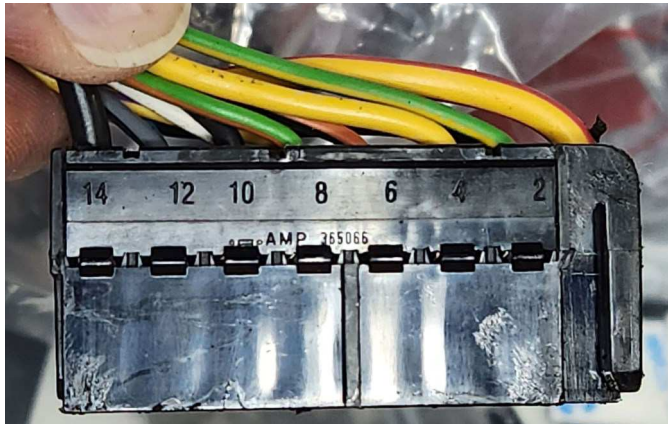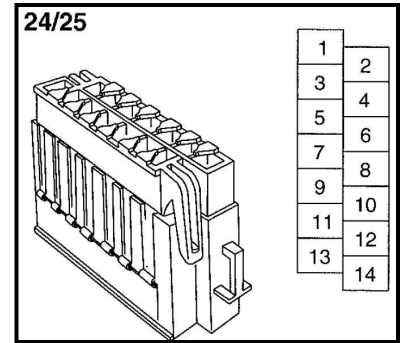

## Grommet 1.

← TO CONN 1




← TO CONN 1




The following pages will detail the rest of the tailgate harness, in case you need more information about the rest of the connections.

### Grommet 2.

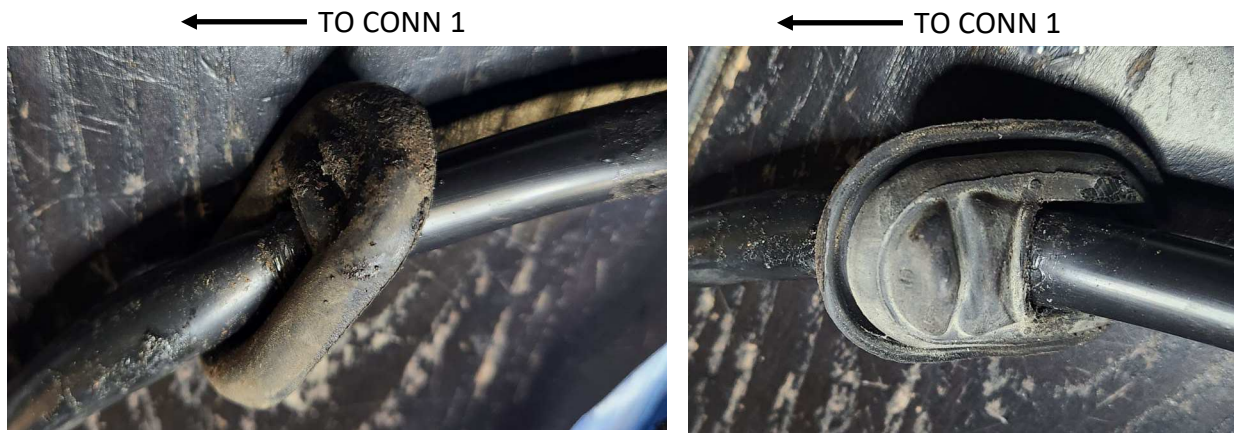

2


### 4-Pole Female Connector (BLACK). Rear Wiper.



VIEW FROM REAR


#### WIRE COLORS:

- |    |          |        |                               |
|----|----------|--------|-------------------------------|
| 1. | Grn-Org  | to 1/8 | 14-pole pin 8. Wiper control. |
| 2. | Yell-Vio | to 1/9 | 14-pole pin 9. Wiper power.   |
| 3. | Org-Blk  | to 1/7 | 14-pole pin 7. Wiper ground.  |
| 4. | —        |        |                               |

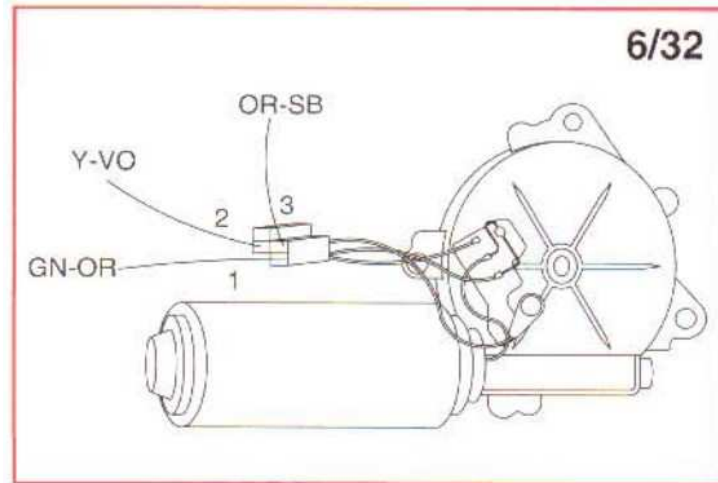

3


### 2-Pole Female Connector (BLACK). Rear heated glass.



VIEW FROM REAR


#### WIRE COLORS:

- |                 |        |                |
|-----------------|--------|----------------|
| 1. Yell-Red 3.0 | to 1/1 | 14-pole pin 1. |
| 2. Yell-Grn     | to 1/2 | 14-pole pin .  |

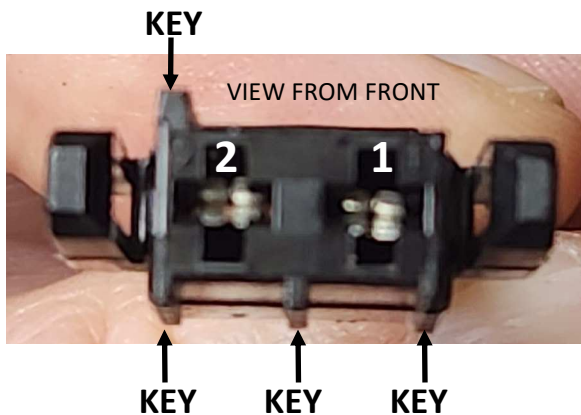

4

### 5-Pole Female Connector (GREEN). Center brake light.







VIEW FROM REAR

#### WIRE COLORS:

- |             |                |                        |
|-------------|----------------|------------------------|
| 1. Gray-Blk | to 1/12        | 14-pole pin 12.        |
| 2. —        |                |                        |
| 3. —        |                |                        |
| 4. —        |                |                        |
| 5. Blk 1.0  | to *Blk Common | Common splice. Ground. |

\*Blk common splice: Common with 1/10, 4/5, 5/8, 6/2.

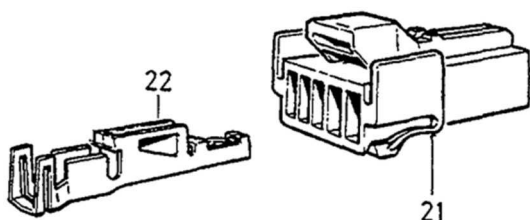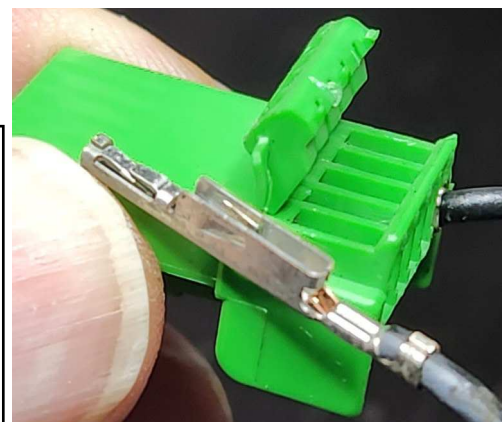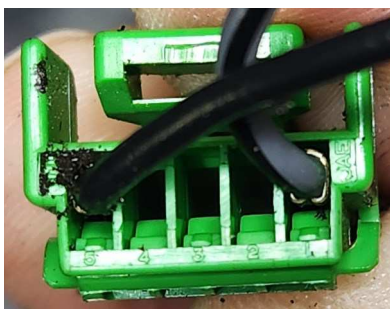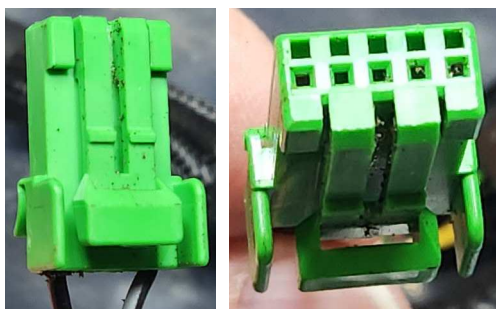


21	978305-1	X	-	-	-	-	Tab housing	.....	Sjättisolator	.....	5-POLE
22	978304-4	X	-	-	-	-	Cable terminal	.....	Ledningsko	.....	0,35-0,8mm²



5

## 8-Pole Female Connector (BLACK). Tailgate lock.





VIEW FROM REAR

### WIRE COLORS:


- |             |   |  |
|-------------|---|--|
| 1. Blu-Brn  | to 1/13   | 14-pole pin 13. Tailgate lock microswitch. |
| 2. —        | (or Blk if wire is present. Common with pin 8 Blk ground) |  |
| 3. —        |   |  |
| 4. —        | (or Yel-Gray if wire is present. To 1/5 14-pole)          |  |
| 5. —        | (or Grn/Brn if wire is present. To 1/6 14-pole)           |  |
| 6. Pink-Blk | to 1/3 (or Yel-Brn)                                       | 14-pole pin 3.                             |
| 7. Yell     | to 1/4  | 14-pole pin 4.                             |
| 8. Blk 1.0  | to *Blk Common  | Common splice. Ground.                     |

\*Blk common splice: Common with 1/10, 4/5, 5/8, 6/2.

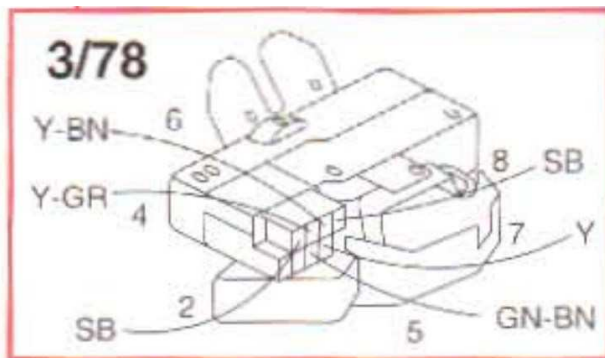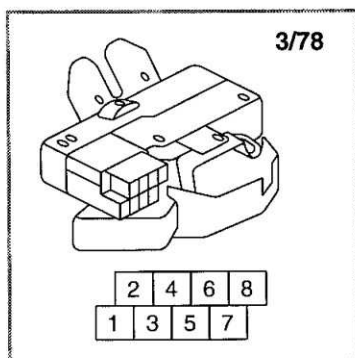

6

## 2-Pole Female Connector (WHITE). License plate lights.





VIEW FROM REAR

### WIRE COLORS:


- |            |                |                        |
|------------|----------------|------------------------|
| 1. Wht     | to 1/11        | 14-pole pin 11.        |
| 2. Blk 1.0 | to *Blk Common | Common splice. Ground. |

\*Blk common splice: Common with 1/10, 4/5, 5/8, 6/2.

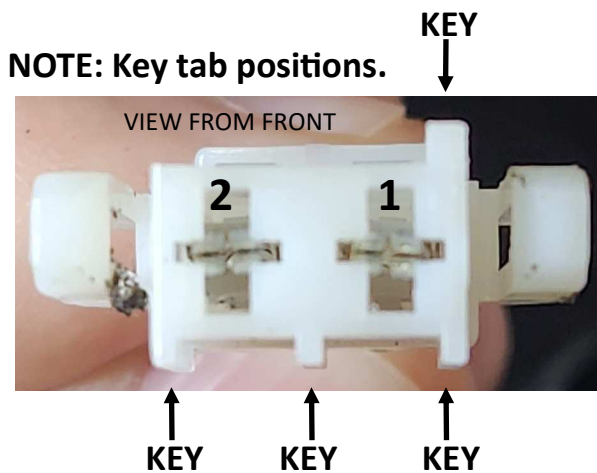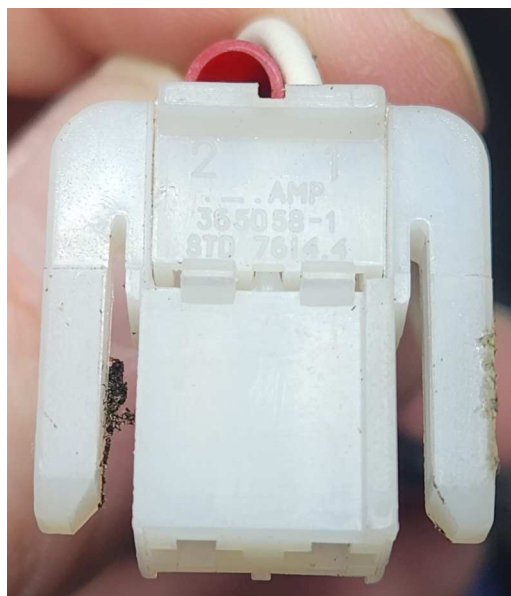

7


## 2-Pole Female Connector (BLACK). Ground for rear heated glass.



VIEW FROM REAR

### WIRE COLORS:

- |    |     |     |         |   |
|----|-----|-----|---------|---|
| 1. | Blk | 3.0 | to 1/14 | 14-pole pin 14. Ground for rear glass heater. |
| 2. | —   |     |         |   |

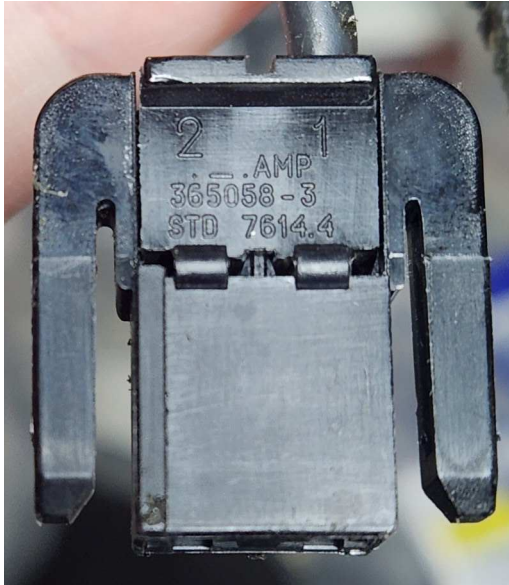

### NOTE: Key tab positions.

